


Spherical Roller Bearings



Modification and style codes:
 K = tapered bore
 CJ = 2 piece steel cage - window type
 VCSJ = 2 piece steel cage - finger type
 YM = 1 piece brass cage - finger type
 YMB = 1 piece brass, finger type, land piloted
 YMD = 2 piece brass, finger type, land piloted
 W33 = 3 holes and groove in O.D.
 W800 = shaker screen modification:
 - tighter bore diameter and O.D. tolerances
 - brass cage
 - RIC in upper 2/3 of clearance specified
 W47 = inner ring with oversize bore

Internal Clearance:
 C2 less than C0
 C0 normal
 C3 greater than C0
 C4 greater than C3
 C5 greater than C4
 C6 special clearance

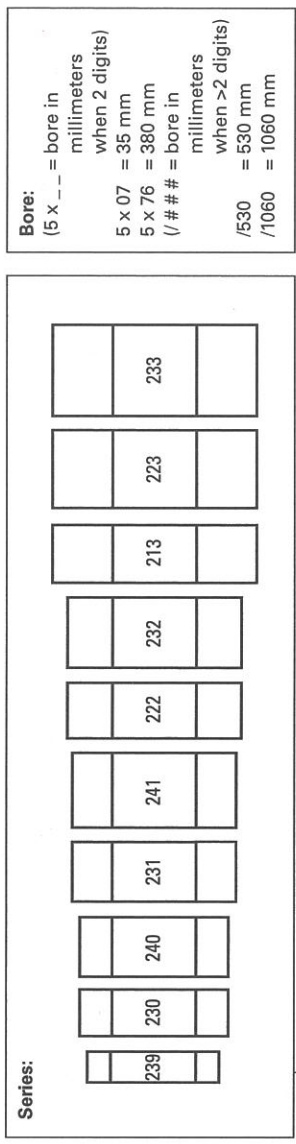