


STANDARD

LOCKNUT & LOCKWASHER, INC.

N-00 SERIES

LOCKNUT DIMENSIONS

INCH DESIGN / FOR BALL BEARINGS AND CYLINDRICAL, SPHERICAL AND TAPERED ROLLER BEARINGS

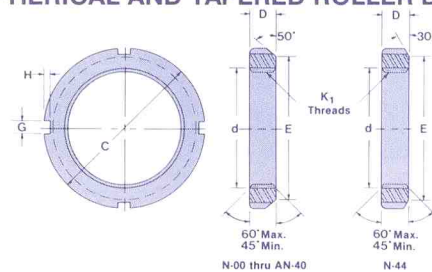

DIMENSIONS IN INCHES

LOCKNUT NO.	THREADS		OUTSIDE DIA. C MAX.	FACE DIA. E MAX.	NUT WIDTH D MAX.	SLOT		FACE RUNOUT Sd MAX.	APP. WT. LB/C
	MAJOR DIA. d MIN.	NO. PER IN. K1				WIDTH G MIN.	DEPTH H MAX.		
N-00	0.391	32	0.755	0.625	0.229	0.120	0.073	0.002	2.0
N-01	0.469	32	0.880	0.719	0.323	0.120	0.073	0.002	3.3
N-02	0.586	32	1.005	0.813	0.323	0.120	0.104	0.002	3.5
N-03	0.664	32	1.130	0.938	0.354	0.120	0.104	0.002	5.3
N-04	0.781	32	1.380	1.125	0.385	0.178	0.104	0.002	9.0
N-05	0.969	32	1.568	1.281	0.416	0.178	0.104	0.002	11.5
N-06	1.173	18	1.755	1.500	0.416	0.178	0.104	0.002	13.0
N-07	1.376	18	2.068	1.813	0.448	0.178	0.104	0.004	21.0
N-08	1.563	18	2.255	2.000	0.448	0.240	0.104	0.004	22.5
N-09	1.767	18	2.536	2.281	0.448	0.240	0.104	0.004	29.0
N-10	1.967	18	2.693	2.438	0.510	0.240	0.104	0.004	34.0
N-11	2.157	18	2.974	2.656	0.510	0.240	0.135	0.004	42.0
N-12	2.360	18	3.161	2.844	0.541	0.240	0.135	0.004	47.0
N-13	2.548	18	3.380	3.063	0.573	0.240	0.135	0.004	55.0
N-14	2.751	18	3.630	3.313	0.573	0.240	0.135	0.004	63.8
AN-15	2.933	12	3.880	3.563	0.604	0.360	0.135	0.004	78.8
AN-16	3.137	12	4.161	3.844	0.604	0.360	0.135	0.004	92.5
AN-17	3.340	12	4.411	4.031	0.635	0.360	0.166	0.004	104.0
AN-18	3.527	12	4.661	4.281	0.698	0.360	0.166	0.004	130.0
AN-19	3.730	12	4.943	4.563	0.729	0.360	0.166	0.004	153.8
AN-20	3.918	12	5.193	4.813	0.760	0.360	0.166	0.004	178.8
AN-21	4.122	12	5.443	5.000	0.760	0.485	0.198	0.004	193.8
AN-22	4.325	12	5.724	5.281	0.791	0.485	0.198	0.004	223.0
AN-24	4.716	12	6.130	5.688	0.823	0.485	0.198	0.006	255.0
AN-26	5.106	12	6.755	6.188	0.885	0.610	0.260	0.006	317.0
AN-28	5.497	12	7.099	6.531	0.948	0.610	0.260	0.006	355.0
AN-30	5.888	12	7.693	7.063	0.979	0.610	0.291	0.006	475.0
AN-32	6.284	8	8.068	7.438	1.041	0.610	0.291	0.006	525.0
AN-34	6.659	8	8.661	8.031	1.073	0.610	0.291	0.006	662.5
AN-36	7.066	8	9.068	8.375	1.104	0.735	0.323	0.006	665.0
AN-38	7.472	8	9.474	8.781	1.135	0.735	0.323	0.006	775.0
AN-40	7.847	8	9.849	9.156	1.198	0.735	0.323	0.006	850.0
N-44	8.628	8	11.005	9.843	1.260	0.980	0.510	0.006	1050.0

NOTES: Available in left hand thread, (NL series), plated, and 15-40 are available with 11 threads per inch (N series).

K1 Threads—American National Form NS Class 3.